

GFG Pro[®]

by **DEVILBISS**
AUTOMOTIVE REFINISHING

The ultimate in conventional refinishing technology.

1// The new style trigger

The new trigger profile is designed for comfort while the new Torx drive makes trigger removal quick and simple. Working together with the unique spool design air valve, this provides the best ever control with no "kick" when you trigger a traditional spray gun.

2// Total control


The fan and fluid controls have been redesigned to provide smooth, accurate operation, particularly when wearing gloves.

3// Legendary fit and feel

When it comes to fit and feel, nothing in the world of conventional spray guns comes close to the new ergonomically designed GFG Pro lightweight aluminium gun body.

4// The right gun, at a glance.

The GFG Pro comes complete with four different coloured identifying snap rings, so you always have the right gun for the job.

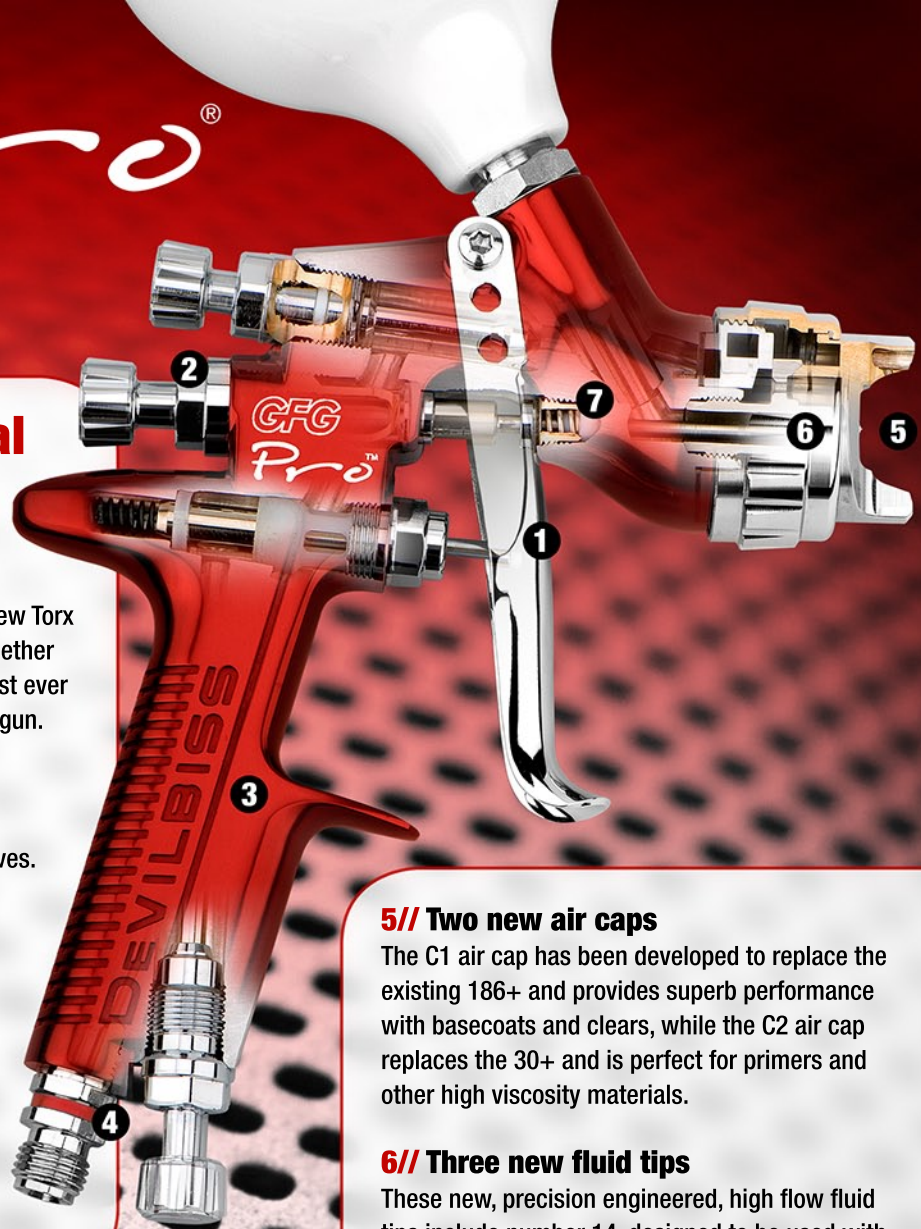

5// Two new air caps

The C1 air cap has been developed to replace the existing 186+ and provides superb performance with basecoats and clears, while the C2 air cap replaces the 30+ and is perfect for primers and other high viscosity materials.

6// Three new fluid tips

These new, precision engineered, high flow fluid tips include number 14, designed to be used with the C1 air cap, number 16 for slightly higher viscosity materials and number 18 designed to be used with the C2 air cap.

7// A perfect seal

The traditional needle packing has been replaced by a new self-adjusting system that is self-sealing and ensures the smoothest ever trigger action.

The conventional DeVilbiss GFG gravity feed spray gun remains incredibly popular throughout the world and improving this already excellent spray gun might have been a challenge, were it not for the development of the DeVilbiss Pro range.

With this in mind, the DeVilbiss technicians have combined the revolutionary new design features of the GTi Pro with two advanced technology compliant air caps called C1 and C2 together with specially developed fluid tips, numbered 14, 16 and 18, to suit every automotive refinishing material from primers to top and clear coats.



GFG Pro Refinisher's Kits

The GFG Pro gravity feed spray gun is only available as a complete ready-to-spray refinishers kit. The boxed kit includes the complete red anodized gun, gravity cup with paint filter, set of four coloured identification rings, Torx driver/screwdriver, cleaning brush, combination spanner & instruction manual. When ordering specify the air cap (C1 or C2), the tip size of your choice (14, 16 or 18).



GFG Pro Spray Gun Kits

// Part No. Description

GFGPRO-C1-14	Gravity Gun & Cup – C1 Air Cap & 1.4 mm Fluid Tip
GFGPRO-C1-16	Gravity Gun & Cup – C1 Air Cap & 1.6 mm Fluid Tip
GFGPRO-C2-18	Gravity Gun & Cup – C2 Air Cap & 1.8 mm Fluid Tip

Kit includes GFG Pro Gravity Gun, cup, paint filter, brush and multi-fit spanner

// Specification

Air Inlet Pressure	C1 2.5 – 3.0 bar (30 – 45 psi) C2 2.5 – 4.0 bar (30 – 60 psi)
Air Consumption	C1 300 l/min (10.6 CFM) @ 3.0 bar C2 305 l/min (12.8 CFM) @ 3.0 bar
Air Inlet Thread	1/4" Universal
Cup Capacity	560 ml
Weight (gun & cup)	768 gms
Air Cap & Ring	Plated Brass
Fluid Tip	Stainless Steel
Fluid Needle	Stainless Steel



DeVilbiss Automotive Refinishing
 Ringwood Road, Bournemouth,
 Dorset. BH11 9LH
 Tel: +44 (0) 1202 571111
 Fax: +44 (0) 1202 573488
 Email: auto-refinish@itwfinishing.co.uk

GFG Pro
 by **DEVILBISS**
 AUTOMOTIVE REFINISHING

www.devilbisseu.com